


3M-Matic™ Case Sealers

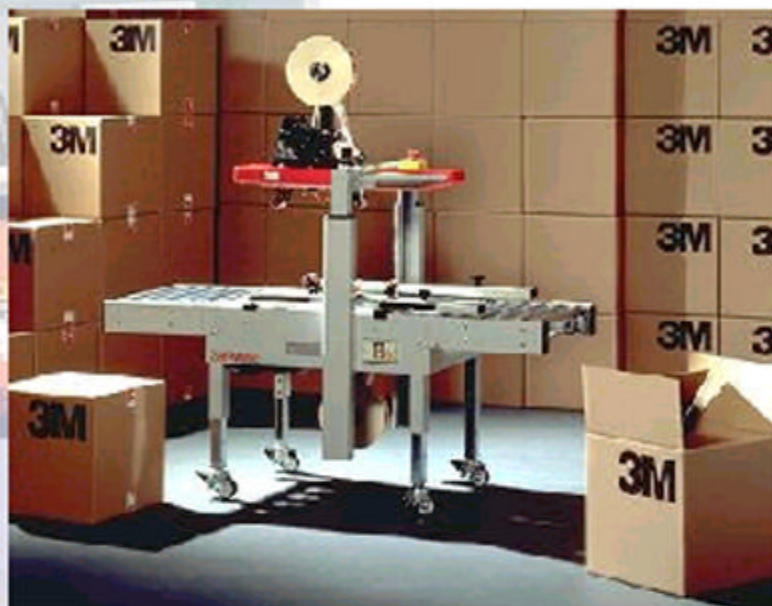

Specifications for Box:

Style: Regular Slotted Carton (RSC)

Please request a copy of our box
specification leaflet, TA075

Power: Electrical - 240V, 50 Hz, 120 watts
single phase.

Other voltages available upon request.

Please note: it may be possible to make
machine adjustments in order to take
slightly different box sizes than stated in
our Product Information Sheets.
For a more detailed specification,
contact us.

for further details on the 100a, the further range
of 3M-Matic Case Sealers, 3M's Warranties
and the range of 3M Box Sealing Tapes, contact:


100a

Bottom Belt Drive
Adjustable Case Sealer

Even if your packaging requirements are relatively light, the 100a can improve your productivity over manual packaging or alternative packaging systems. It is user friendly and compact, yet, at up to 30 cases per minute, it is more than fast for most packaging applications, with the 3M™ Accuglide™ II Taping Head precisely applying the full range of 3M box sealing tapes.

Key features of the 100a include dual masts with one lead screw for extra stability and uniform height adjustment, a height adjustment crank, adjustable side guides and a sturdy bottom belt drive mechanism with easy to install laced replacement belts that keeps your line running smoothly and efficiently. Additional features are available as options.

Footprint:

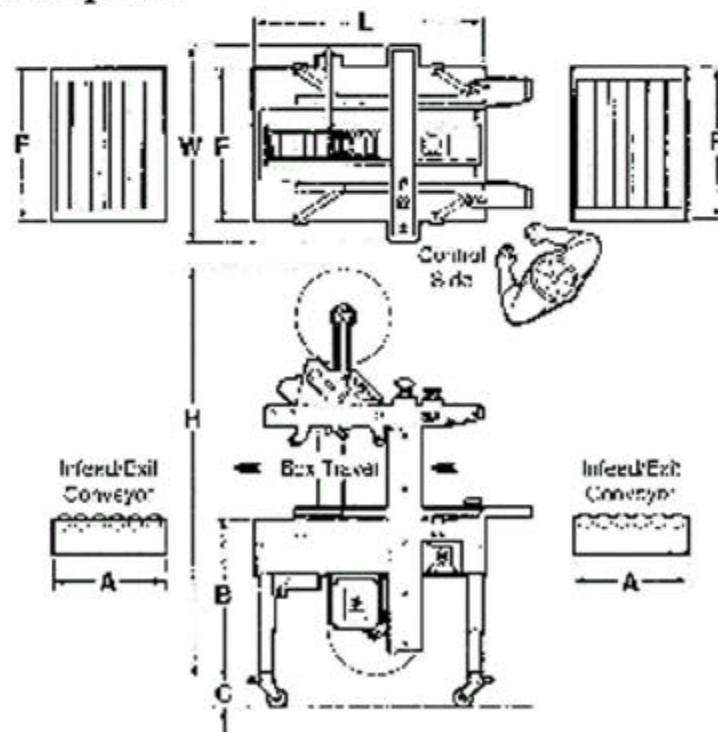

	W	L	H	A*	B	C**	F
Min inches (mm)	31 (787)	36.5 (927)	52 (1320)	18 (460)	22.5 (570)	4 (100)	24.5 (620)
Max inches (mm)	31 (787)	36.5 (927)	52 (1320)	18 (460)	30 (760)	4 (100)	24.5 (620)

* Infeed / Exit conveyors are optional
** Caster are optional

3M Authorised
Distributor