

3M-Matic™ Case Sealers

200a

Bottom Belt Drive
Adjustable Case Sealer



Specifications for Box:

Style: Regular Slotted carton (RSC)

Please request a copy of our box
specification leaflet, TA075

Power: Electrical - 240V, 50 Hz, single phase.
Other voltages available upon request


Please note: it may be possible to make
machine adjustments in order to take
slightly different box sizes than stated in
our Product Information Sheets.
For a more detailed specification,
contact us.

for further details on the 200a, the further range
of 3M-Matic Case Sealers, 3M's Warranties
and the range of 3M Box Sealing Tapes, contact:

The 200a is a durable, dependable way to
meet most case sealing needs. It seals up
to 30 cases per minute with the 3M™
Accuglide™ II Taping Head precisely applying
the full range of 3M box sealing tapes. Both
taping heads can be easily removed for
cleaning and maintenance. The machine
features a quick box height/width adjustment
for added versatility.

Standard features include compression rollers
that position each box for precise tape seals,
an upper tape roll bracket attached to the
machine for easier tape mounting, friction
brake drums to prevent tape overrun and
provide more consistent tape application, an
easy to reach alternative outboard tape roll
mount for the lower head and easy to install
laced replacement belts. Additional features
are available as options.

Footprint:

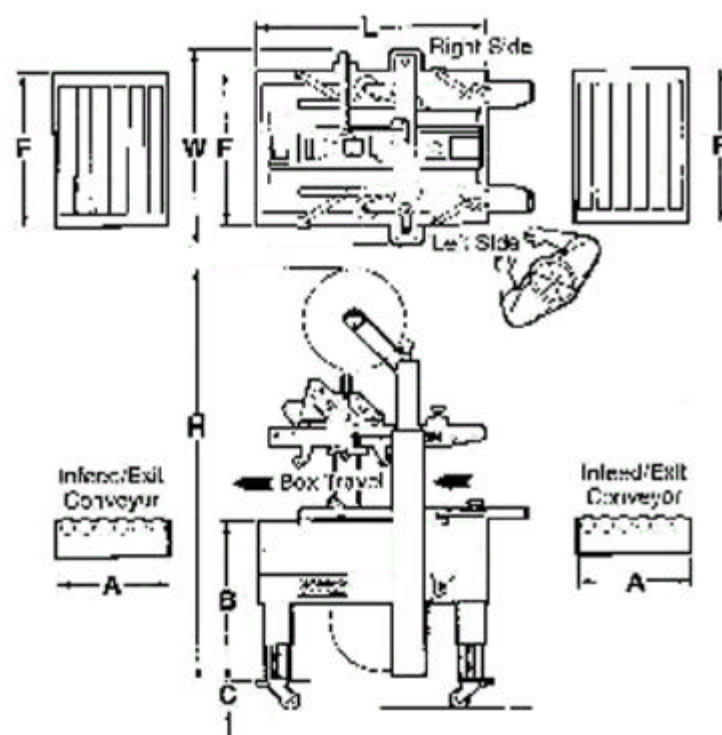

	W	L	H	A*	B	C**	F
Min inches (mm)	31(787)	36.5(927)	53(1346)	18(457)	24(610)	4(100)	24.5(620)
Max inches (mm)	31(787)	36.5(927)	86(2184)	18(457)	35(889)	4(100)	24.5(620)
Masts in upper Position			90(2290)		20.5(520)		
			Minimum		Minimum		
					(31(787))		
					Minimum		

* Infeed / Exit conveyors are optional
** Closets are optional

3M Authorised
Distributor