

# 3M-Matic™ Case Sealers

## 700a

### Top and Bottom Belt Drive Adjustable Case Sealer



#### Specifications for Box:

Style: Regular Slotted Carton (RSC)

Please request a copy of our box  
specification leaflet, TA075

Power: Electrical - 240V, 50 Hz, single phase.  
Other voltages available upon request


Please note: it may be possible to make  
machine adjustments in order to take  
slightly different box sizes than stated in  
our Product Information Sheets.  
For a more detailed specification,  
contact us.

for further details on the 700a, the further range  
of 3M-Matic Case Sealers, 3M's Warranties  
and the range of 3M Box Sealing Tapes, contact:

The advanced features of the 700a make  
sealing of uniform size cartons fast, precise  
and productive. A unique upper and lower  
drive system using four belts positively  
conveys cases at up to 30 per minute with  
the 3M™ Accuglide™ II Taping Head  
precisely applying the full range of 3M box  
sealing tapes. Manual adjustments for various  
box sizes can be made quickly and easily.

Standard features include compression rollers  
that position each box for precise tape seals,  
an upper tape roll bracket attached to the  
machine for easier tape mounting, friction  
brake drums to prevent tape overrun and  
provide more consistent tape application, an  
easy to reach alternative outboard tape roll  
mount for the lower head and easy to install  
laced replacement belts. Additional features  
are available as options.

#### Footprint:

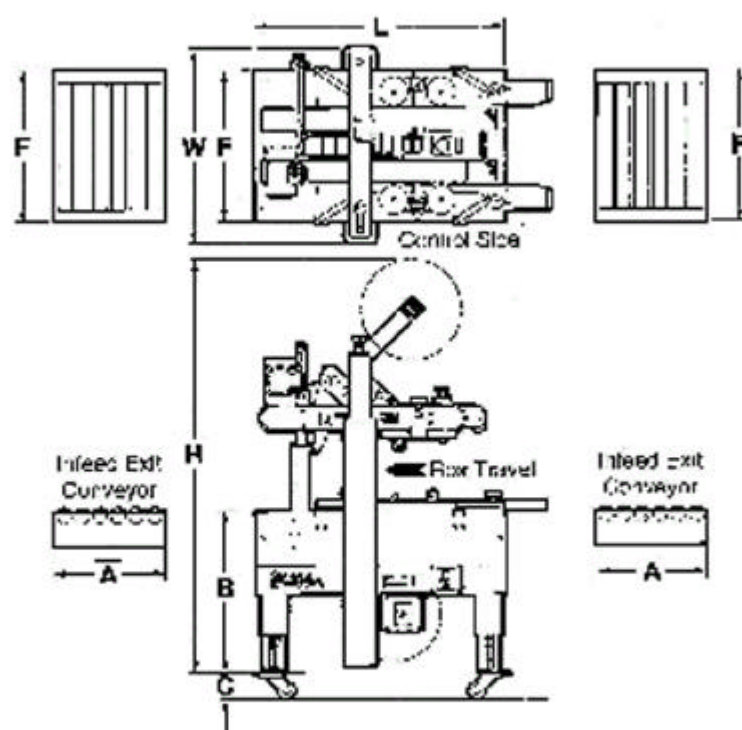

	W	L	H	A*	B	C**	F
Min inches (mm)	31 (787)	40.5 (1030)	53 (1346)	18 (457)	24 (610)	4 (100)	24.5 (622)
Max inches (mm)	31 (787)	40.5 (1030)	86 (2184)	18 (457)	35 (889)	4 (100)	24.5 (622)
Max in upper Position			90 (2290)		20.5 (521)		
			Minimum		Minimum		
					31 (780)		
					Minimum		

\* Infeed / Exit conveyors are optional  
\*\* Closures are optional



Authorised  
Distributor