3 M. 3M. Matic and Accrepities are trademaries of the 3 M Company I A048 12/200

3M-Matic[™] Case Sealers



Specifications for Box:

Regular Slotted carton (RSC)

Please request a copy of our box specification leaflet, TA075

Power: Electrical - 240 V, 50 Hz, single phase. Other voltages available upon request

Please note: it may be possible to make machine adjustments in order to take slightly different box sizes than stated in our Product Information Sheets. For a more detailed specification, contact us.


for further details on the 700aks, the further range of 3M-Matic Case Sealers, 3M's Warranties and the range of 3M Box Sealing Tapes, contact:

Top and Bottom Belt Drive Adjustable King Size Case Sealer

The 700aks makes sealing large, uniform size cartons fast and precise. In fact, it's designed especially for long runs of large cartons associated with appliance, electronic, furniture and bedding industries. A unique upper and lower drive system using four belts positively conveys cases at up to 30 per minute with the 3M™ Accuglide™ II Taping Head precisely applying the full range of 3M box sealing tapes.

Standard features include compression rollers that position each box for precise tape seals, an upper tape roll bracket attached to the machine for easier tape mounting, friction brake drums to prevent tape overrun and provide more consistent tape application, an easy to reach alternative outboard tape roll mount for the lower head and easy to install laced replacement belts. Additional features are available as options.

Footprint:

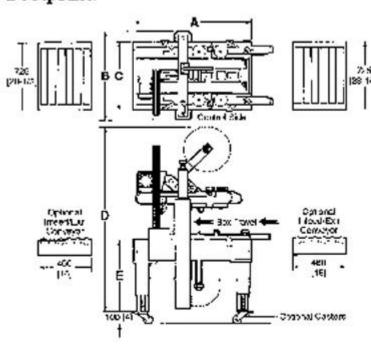

Min inches (mm) Max inches (mm) 33.75(855) 42.5(1.080) 55(1.420) 33.75(855) 42.5(1.080) 87(2.210) 20.5(520)

Infeed / Exit correyous are optional

** Caston are optional

