

3M-Matic™ Case Sealers



Specifications for Box:

Regular Slotted Carton (RSC)

Please request a copy of our box
specification leaflet, TA075

Power: Electrical - 240V, 50 Hz, single phase
Pneumatic - 5 bar, 110 litres/minute at max box
rate, 1 bar - 21 degrees C

Please note: it may be possible to make
machine adjustments in order to take
slightly different box sizes than stated in
our Product Information Sheets.
For a more detailed specification,
contact us.

for further details on the 700r, the further range
of 3M-Matic Case Sealers, 3M's Warranties
and the range of 3M Box Sealing Tapes, contact:


700r

Top and Bottom Belt Drive Random Case Sealer

Ideal for a variety of box sizes, the versatile 700r Random Case Sealer seals up to 15 cases per minute, automatically adjusting to each box's height and width. The 3M™ Accuglide™ II Taping Head precisely applies any of the full range of 3M box sealing tapes. Upper mast travel can be restricted during long runs of similar size cases to improve productivity.

Standard features include a pneumatic packing station, a lockable emergency stop button, an upper tape roll bracket attached to the machine for easier tape mounting, friction brake drums to prevent tape overrun and provide more consistent tape application, an easy to reach alternate outboard tape roll mount for the lower head and easy to install laced replacement belts. Additional features are available as options.

Footprint:

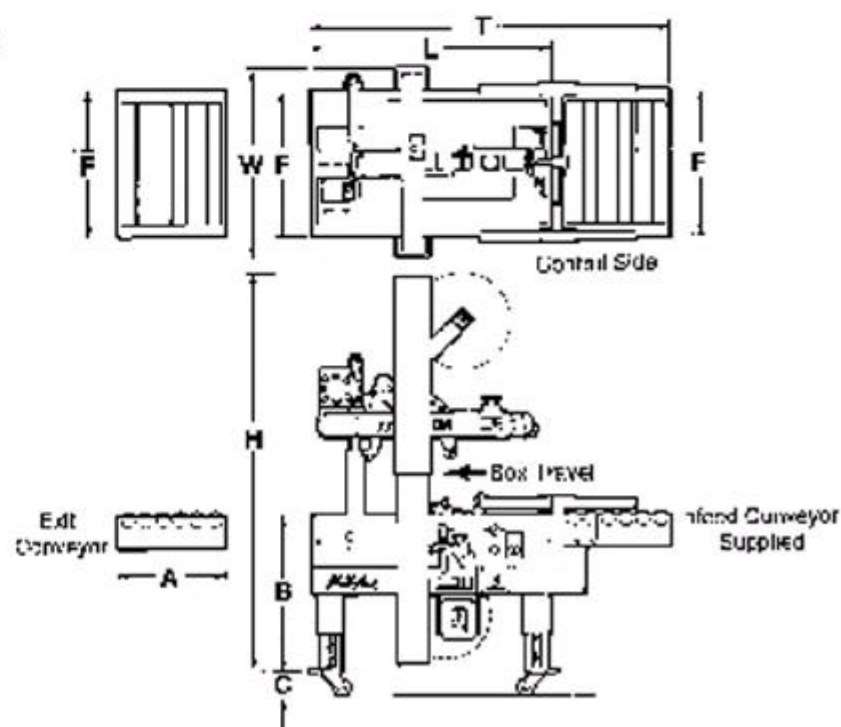

	W	L	H	A*	B	C**	F
Min inches (mm)	31(787)	40.5(1030)	53(1346)	18(457)	24(610)	4(100)	24.5(622)
Max inches (mm)	31(787)	40.5(1030)	86(2184)	18(457)	35(889)	4(100)	24.5(622)
Masts in upper Position			90(2290)	Minimum	Minimum		
					31(780)		Minimum

T = 645(1637)

* Infeed/Exit conveyors are optional

** Closures are optional



Authorised
Distributor