


3M-Matic™ Case Sealers

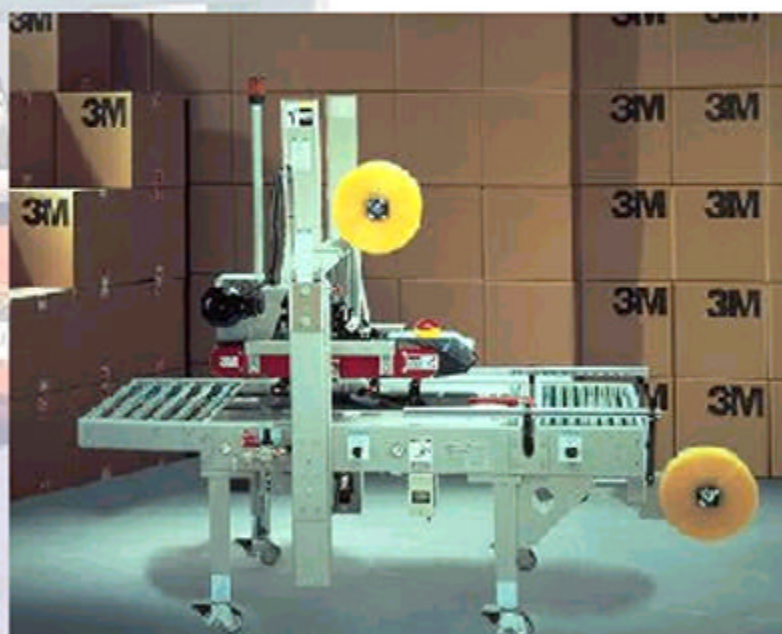

Specification for Box:

Regular Slotted Carton (RSC)

Please request a copy of our box
specification leaflet, TA075

Power: Electrical - 240V, 50 Hz, single phase
Pneumatic - 5 bar, 70 litres/minute at max box
rate, 1 bar - 21 degrees C

Please note: it may be possible to make
machine adjustments in order to take
slightly different box sizes than stated in
our Product Information Sheets.
For a more detailed specification,
contact us.

for further details on the 700rks, the further range
of 3M-Matic Case Sealers, 3M's Warranties
and the range of 3M Box Sealing Tapes, contact:


700rks

Top and Bottom Belt Drive Random King Size Case Sealer

The 700rks is designed especially for
productive sealing of large size cartons, such
as those used in the appliance, electronics,
bedding and furniture industries. The versatile
700rks case sealer is ideal for sealing a
variety of case sizes on the same production
line at up to 15 cases per minute,
automatically adjusting to each case's
height and width. The 3M™ Accuglide™ II
Taping Head precisely applies any of the
range of 3M box sealing tapes.

Standard features include a pneumatic
packing station, an upper tape roll bracket
attached to the machine for easier tape
mounting, friction brake drums to prevent
tape overrun and provide more consistent
tape application, an easy to reach alternate
outboard tape roll mount for the lower head
and easy to install laced replacement belts.
Additional features are available as options.

Footprint:

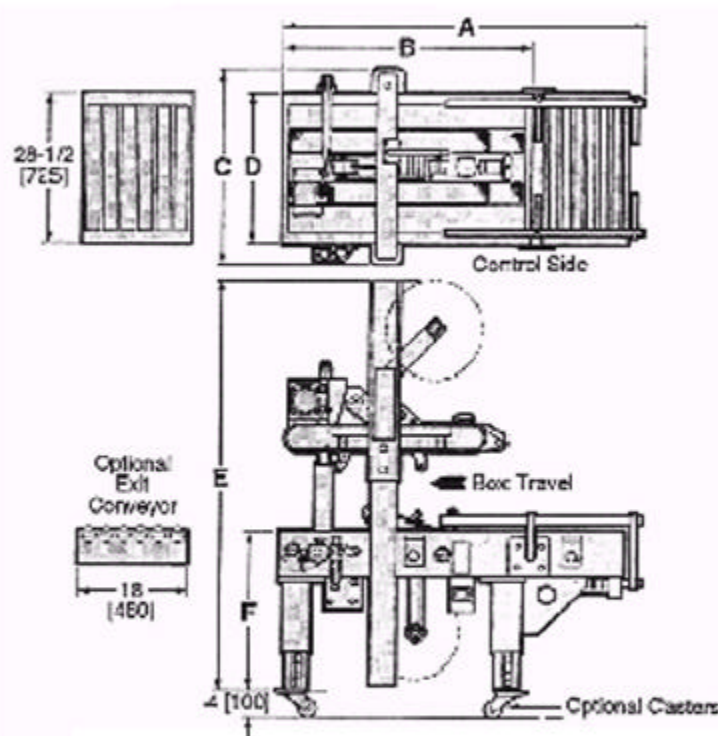

	W	L	H	A*	B	C**	F
Min inches (mm)	31(790)	36.5(933)	52(1320)	18(460)	22.5(570)	4(100)	24.5(630)
Max inches (mm)	31(790)	36.5(933)	52(1320)	18(460)	30(760)	4(100)	24.5(630)

* In feed / Exit conveyors are optional
** Casters are optional

3M Authorised
Distributor