

3M-Matic™ Case Sealers



Specifications for Box:

Regular Slotted cartons (RSC)

Please request a copy of our box
Specification Leaflet, TA075

Power: Electrical - 240V, 50 Hz, single phase
Pneumatic - 5 bar, 75 litres/minute at max box
rate, 1 bar - 21 degrees C

Please note: it may be possible to make
machine adjustments in order to take
slightly different box sizes than stated in
our Product Information Sheets.
For a more detailed specification,
contact us.

for further details on the 800af, the further range
of 3M-Matic Case Sealers, 3M's Warranties
and the range of 3M Box Sealing Tapes, contact:

800af


Side Belt Drive

Automatic Adjustable Case Sealer

The 800af is a fully automatic adjustable case sealer efficient in a variety of top and bottom sealing operations. Featuring the 3M™ Accuglide™ II Taping Head, this machine adjusts to a wide variety of boxes for precise application of any of the full range of 3M box sealing tapes. The 800af case sealer automatically folds top flaps and seals RSC's at up to 28 per minute.

Standard features include laced belts for quick and easy replacement, dual compression rollers that help position top flaps for improved sealing, side shields at machine infeed with hinged access doors and safety interlocks, easily accessible stop switch at each side of the machine, friction brake drums to prevent tape overrun and provide more consistent tape application. As an option, the controls can be ordered for right side operation. Additional features are available as options.

Footprint:

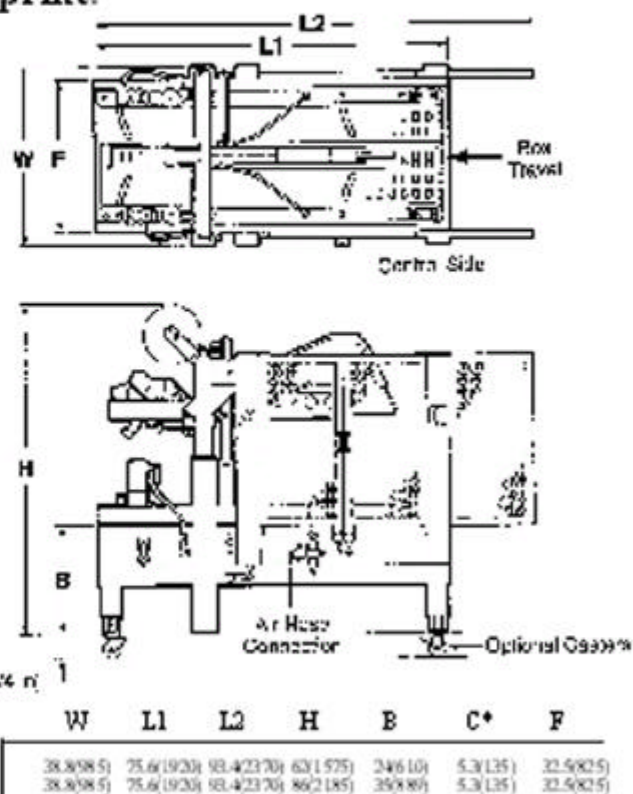

* Controls are optional

3M Authorised
Distributor